

Problem Description:

NX-7000/7005/7010/7015 were produced by two different source codes, these two receiver and mouse could not be mixed pairing. How to solve it?

How to distinguish mouse and receiver?

1.The serial number later than “X6G92890500001” which is source code B, the others is A.

The second number (6) means produced in 2016, the third number (G) means produced in July(A~L, January, February,.....December), and the last five number(00001) is produced number.

FCC code “FSUGMZLD” is source code A, and “FSUGMZLM” is B source code.


A



B



2.The serial number later than “X7A*****”,please also check the receiver’s PID in device manager is “6001”. If PID is “0189”, it will not connect.Plase refer to below picture(how to check PID for the receiver)

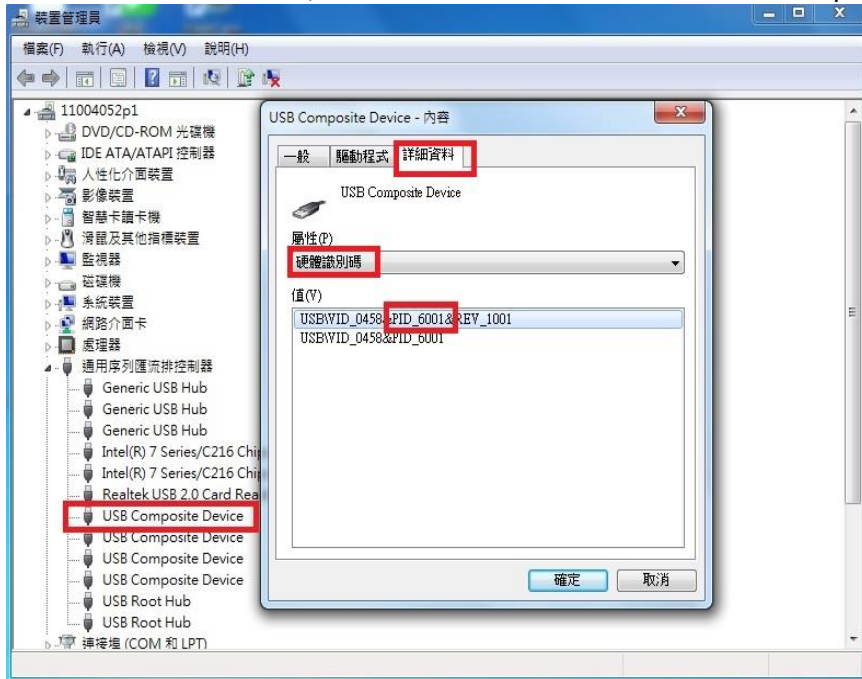

When you plug the receiver into usb slot, you will see “USB Composite Device”and right click the mouse to see it connect. Then Click “Detail” and select “Hardware Identification”.

Pairing SOP as below.

Step1.Insert the Receiver to USB Port, and then turns on the mouse immediately.

Step2.Press the Middle scroll + Right key at the same time within ten seconds, the receiver and mouse will be connected automatically.



a. If you would like to pair another receiver or mouse, please repeat step 1 & 2.

Note : Please do mouse and receiver pairing procedure within 5cm distance.



b. If you want to pair mouse to another receiver, remove the original receiver from USB port.

c. Repeat step 1 & 2 if fail the pairing.